

CONIPUR EPDM 1-3.5mm

Granules for the In-Situ Construction of Running Tracks and Multi-Purpose Playgrounds

Product description

CONIPUR EPDM 1-3.5mm granules are applied with pavers, broadcasted or compacted by hand for the construction of sports-floorings,

Fields of application

CONIPUR EPDM 1-3.5mm is used – together with a CONIPUR binder or CONIPUR coating – for the in-situ

construction of running tracks, multi-purpose surfaces or playgrounds.


Properties

CONIPUR EPDM 1-3.5mm granules are available in different colours.

The granules are durable, flexible, of high quality and easy to apply.

Technical data

specific weight, grain size 1-3.5mm	kg/dm ³	1.6 +/- 0.03
bulk density, grain size 1-3.5mm	g/l	670 +/- 10
polymer content	%	≥ 22
tensile strength	N/mm ²	>5
elongation	%	>500
hardness	Shore A	60 +/- 5
Above figures are guide values and must not be used as a base for specifications!		

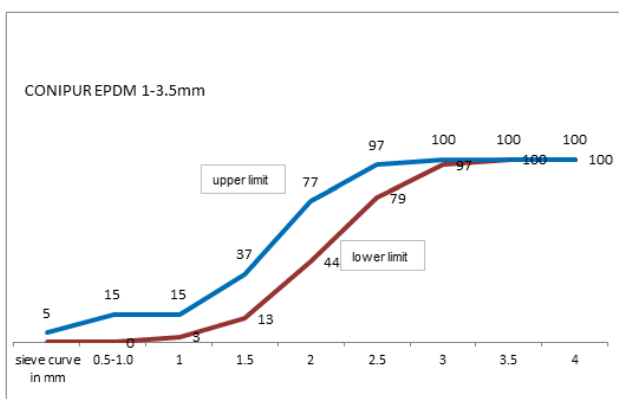

Pack size

CONIPUR EPDM 1-3.5mm is delivered in bags at 25kg.

Colour

red, further colours on request

Storage

CONIPUR EPDM 1-3.5mm to be stored under dry conditions and sheltered from weather.

Safety pre-cautions

CONIPUR EPDM 1-3.5mm granules is after application non-hazardous.